



LOUVERED DOOR (STANDARD) **FRONT VIEW**

PADLOCKABLE HANDLE WITH 2-PT. LATCH

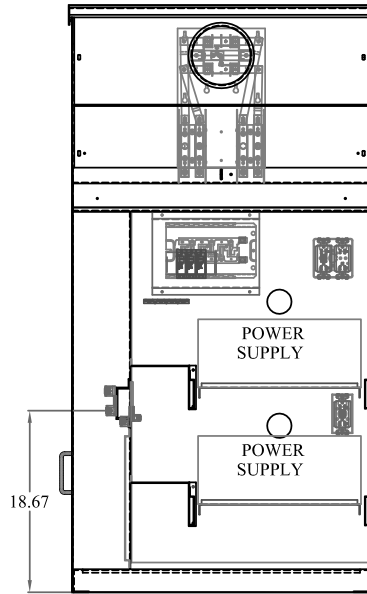


FRONT VIEW
SHOWN LESS CUSTOMER DOOR

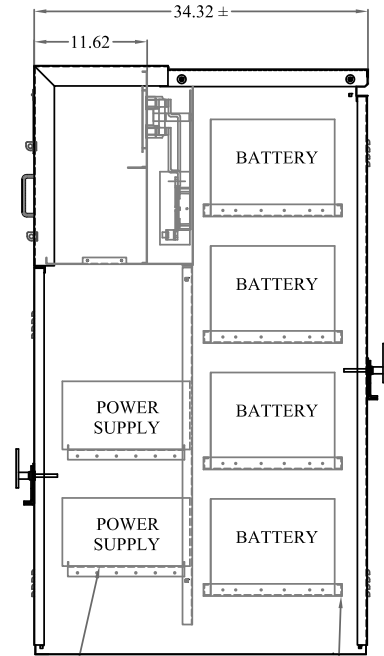

2 POWER SUPPLIES (MAXIMUM PROVIDED BY OTHERS)

SIDE VIEW

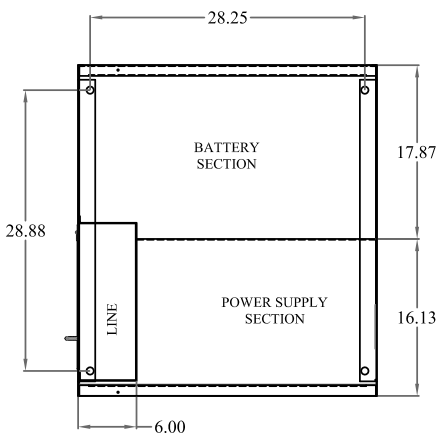

**SINGLE METER STAND-BY
POWER SUPPLY PEDESTAL**

STANDARD FEATURES:

- METER SOCKET WITH TEST BLOCKS 4-JAW
- UTILITY LANDING LUGS 250kCML
- CIRCUIT BREAKER INTERIOR COPPER BUS
- ACCOMODATES 6-CIRCUIT INTERIOR MAXIMUM
- EACH DUPLEX RECEPTACLE FOR TWO (2) POWER SUPPLIES
- MAXIMUM OF SIXTEEN (16) BATTERIES

SPECIFICATIONS

- * NEMA 3R CONSTRUCTION
- * POLYESTER POWDER-COATED FINISH EXCEEDS ASTM B-117 SPECIFICATIONS
- * FABRICATED FROM CORROSION-RESISTANT ZINC COATED STEEL
- * ASA 61 GRAY OR OTHERWISE SPECIFIED

- * ALL FACTORY WIRING 600 VOLT RATED COPPER
- * ALL COMPONENTS UL LISTED
- * ALL EXTERIOR DOORS AND COVERS PADLOCKABLE
- * UTILITY COVERS SEALABLE