



USP16- MODEL SERIES BPU 0-200 AMPS 0-600 VOLTS

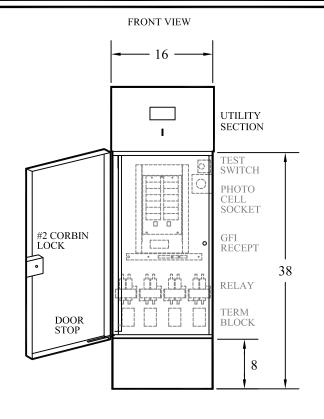

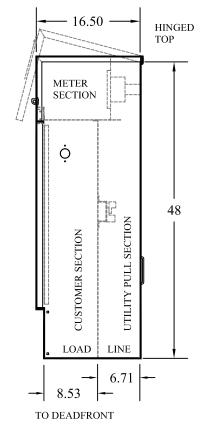

RIGHT SIDE VIEW

14.25

LINE

12.25

LOAD

FRONT

MOUNTING PLAN

SINGLE METER SERVICE PEDESTAL

TYPICAL APPLICATIONS INCLUDE PARKING LOT LIGHTING, HIGHWAY, STREET AND SIGN LIGHTING AND TRAFFIC SIGNAL CIRCUITS.

STANDARD FEATURES

METER SOCKET 4 JAW AND 5 JAW

UTILITY LANDING LUGS 250 KCMIL

STANDARD VOLTAGE 120/240VAC 1 PHASE 3 WIRE

CIRCUIT BREAKER INTERIOR COPPER BUS 12 CIRCUIT

LIGHTING ARRESTOR AVAILABLE 650 VAC

MERCURY RELAY AND TERMINAL BLOCK SIZED FOR EACH

LIGHTING CIRCUIT AS REQUIRED

DOOR STOP TO PREVENT CUSTOMER DOOR SWINGING CLOSED

PHOTOELECTRIC SOCKET

CORBIN LOCK

RECEPTACLE GFI

STANDARD PEDESTAL OF BOARD OF PUBLIC UTILITIES KANSAS CITY, KS

SPECIFICATIONS

- * NEMA 3R CONSTRUCTION
- * NATURAL ALUMINUM FINISH STD.
- * FABRICATED FROM .125 ALUMINUM 5052-H32

- * CUSTOM COLORS AVAILABLE
- * ALL FACTORY WIRING 600 VOLT RATED COPPER
- * ALL COMPONENTS UL LISTED
- * ALL EXTERIOR DOORS AND COVERS PADLOCKABLE
- * UTILITY COVERS SEALABLE