




USP16- MODEL SERIES



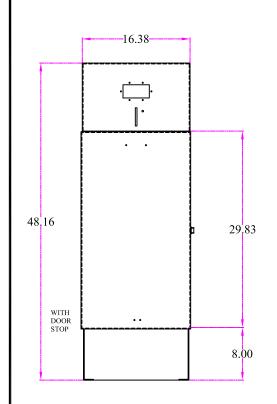


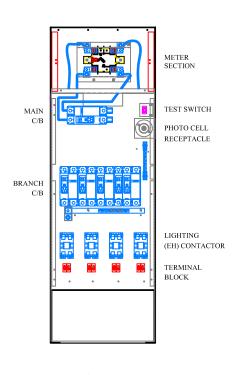

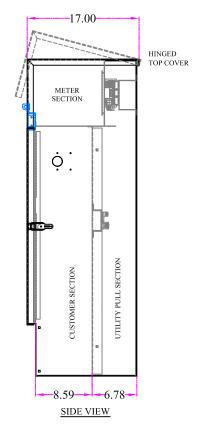

FRONT VIEW

FRONT VIEW SHOWN LESS DOOR & COVERS



PLAN VIEW

STANDARD PEDESTAL OF KANSAS DEPARTMENT OF TRANSPORTAION

SINGLE METER SERVICE PEDESTAL

TYPICAL APPLICATIONS INCLUDE PARKING LOT LIGHTING, HIGHWAY STREET AND SIGN LIGHTING AND TRAFFIC SIGNAL CIRCUITS.

STANDARD FEATURES

METER SOCKET 5TH CLIP JAW ASSY STANDARD VOLTAGE 120 / 240VAC 1-PHASE 3-WIRE OPTIONAL VOLTAGE 240 / 480VAC 1-PHASE 3-WIRE LIGHTING ARRESTER AVAILABLE 650VAC ELECTRICALLY-HELD CONTACTOR AND TERMINAL BLOCK FOR EACH LIGHTING CIRCUIT AS REQUIRED DOOR STOP TO PREVENT CUSTOMER DOOR SWINGING CLOSED PHOTOELECTRIC SOCKET CABLE-IN / CABLE-OUT CIRCUIT BREAKERS

SPECIFICATIONS

- * NEMA 3R CONSTRUCTION
- * .125 ALUMINUM NON-ANODIZED
- * OPTION 12 GA. STEEL
 - + POLYESTER POWDER-COATED FINISH **EXCEEDS ASTM B-117 SPECIFICATIONS**
 - + FABRICATED FROM CORROSION-RESISTANT ZINC COATED STEEL
 - + FORREST GREEN COLOR STANDARD CUSTOM COLORS AVAILABLE

- * ALL FACTORY WIRING 600 VOLT RATED COPPER
- * ALL COMPONENTS UL LISTED
- * ALL EXTERIOR DOORS AND COVERS PADLOCKABLE
- * UTILITY COVERS SEALABLE